Stylophone™ GEN X-1

dübreq

Dubreq Ltd
45 Robertson
Street
Hastings TN34 1HL
United Kingdom

www.dubreq.com/genx1

Stylus Repair Guide

You will need:

- 1 X Replacement Stylophone Stylus Cable
- Cross Head Screwdriver
- Wire Cutters
- Soldering Iron
- Solder

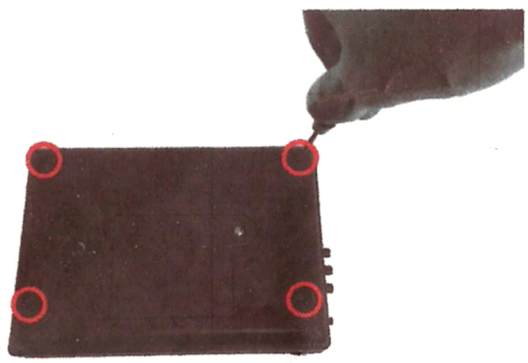

1. Remove screws from underside of Gen X-1.

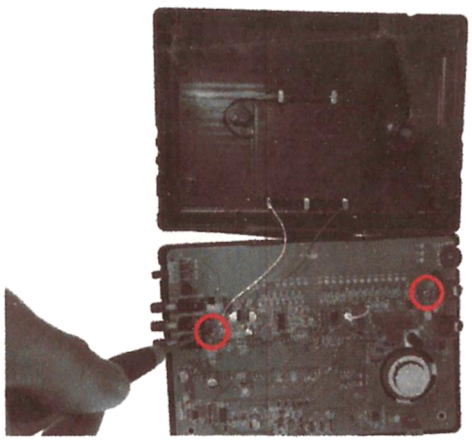

2. Carefully remove screws from board.

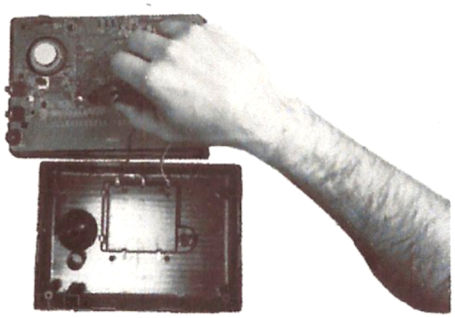

3. Snip damaged cable.

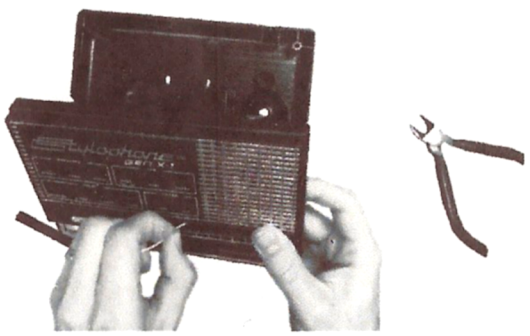

4. Pull damaged stylus cable through opening in stylus holder.

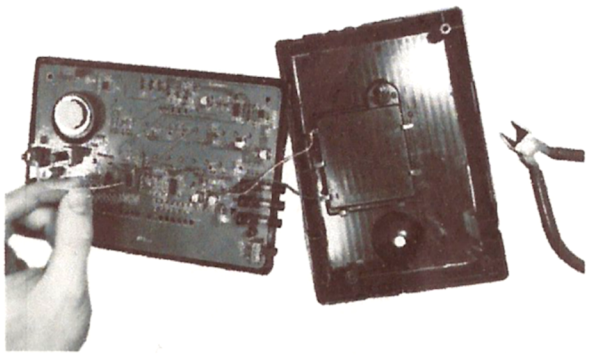

5. Feed new stylus cable back through holder and board.

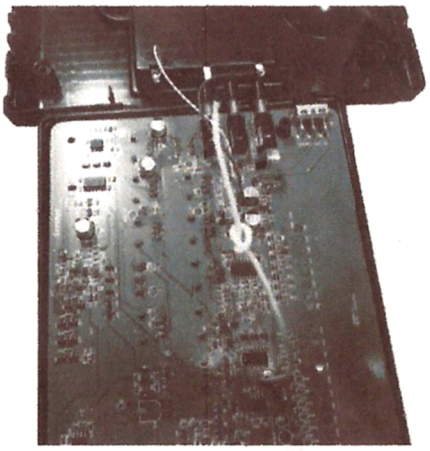

6. Gently tie knot in cable leaving around 15mm slack before knot.

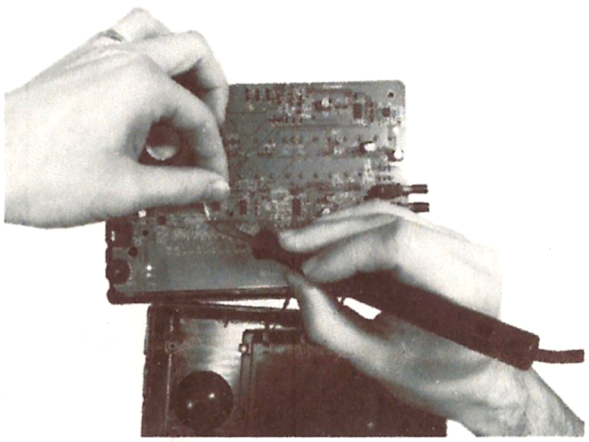

7. Use small amount of solder to join cable to solder pad.

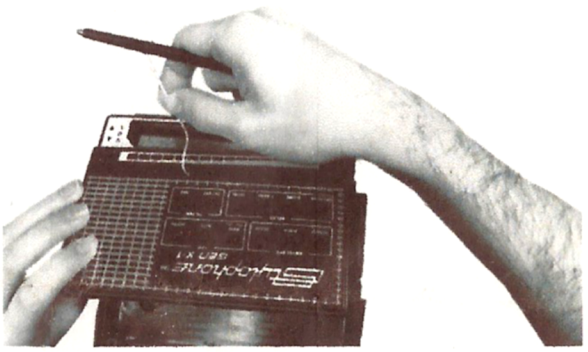

8. Pull stylus cable taut.

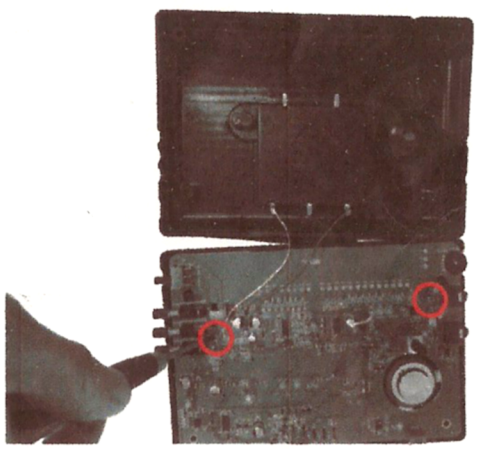

9. Screw board back into place.

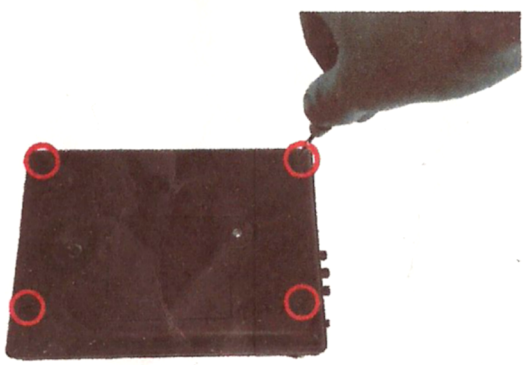

10. Screw enclosure back together.

Disclaimer: Your Stylophone will **NOT** be covered under warranty if damaged whilst being disassembled or repaired by anyone other than Dubreq Ltd.